
Product Datasheet












[m]

[cm]

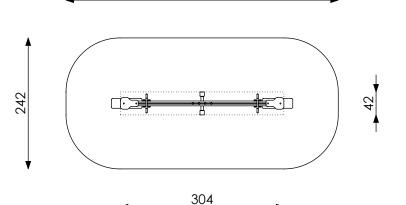

504

Age: 3+

Amount of users: 2

Safety zone: $242 \times 504 \text{ cm} (11.4 \text{ m}^2)$

Free fall height: 120 cm

Weight of the playset: 38 kg

Dimension of the biggest part: 300x9x9 cm

Product compliant with PN-EN 1176-1, PN-EN 1176-6+AC: YES

Spare parts availability: YES



Mounting:

The set is mounted in the ground. Foundations made of C20/25 concrete.

Material specification:

- Main beam made from aluminum square profile 90x90 mm with reinforcements with anodized finish.
- Construction made of a steel profile 80x80 mm, hot-dip galvanized.
- Handles and steel parts, powder coater or hot-dip galvanized.
- Top of the poles secured by cap mades from HDPE.
- Screws, bolts etc. covered by colorful plugs from plastic.

Renders are for reference only, actual appearance may differ from the one shown on the render.

Acceptable shock absorbing surfaces and their minimum thickness

Material ^a	Description [mm]	Minimum depth ^b [cm]	Maximum free heights of fall [cm]
Turf/topsoil		-	≤ 100 ^d
Bark	20 to 80 particle size	20	≤ 200
		30	≤ 300
Woodchip	5 to 30 particle size	20	≤ 200
		30	≤ 300
Sand or gravel °	0,25 to 8 grain size	20	≤ 200
		30	≤ 300
Other materials	As tested according to EN 1177		Critical fall height as tested

^a For further information on specific material properly prepared for use in children's playgrounds



^b For loose particulate material, add 100 mm to the minimum depht to compensate for displacement(see 4.2.8.5.1).

c Sand and gravel shall be well rounded and washed to eliminate most of the silt of clay particles. Washed sand and grave list considered to be from alluvial (natural eroded) deposits and free from most sil tor clay particles. For gravel this may commonly be described as 'pea shingle'. Uniformity coefficient D60/D10<3,0.Grain size can be indentified by use of a sieve test, as in EN 933-1(see Annex G)

d See NOTE 2 in 4.2.8.5.2