
PLATEAU PICNIC ROUND

#203 MOUNTING GUIDE



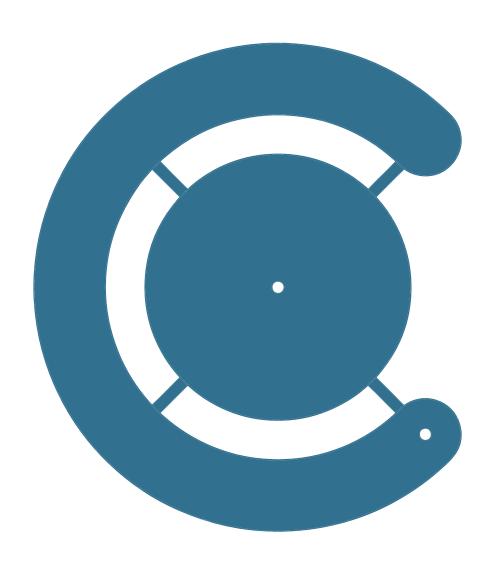

PLATEAU PICNIC ROUND

Developed by out-sider in collaboration with Holscher Design 2021.

INDEX:	PAGE
Item list	02
Fixation of legs onto center tube	03
Fixation of seat onto leg frame	04
Fixation of table onto center tube	05
Fixation of disc	06
Cleaning and maintenance	07


ITEM LIST

Screws/bolts

- 12x M10x12 button head Hexagon socket
- 4x M10x20 cylinder Hexagon socket
- 1x M8x100 Hexagon socket
- 1x M8 nut

Tools (not included)


- Allen key set
- Socket wrench set

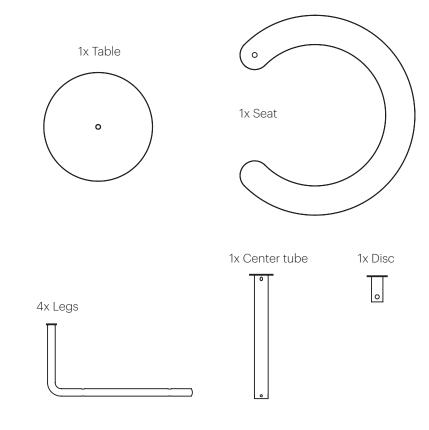

ADD-ONS


Add-ons, are not included with standard product

1x Point Sun f. Picnic Round




1: FIXATION OF LEGS ONTO CENTER TUBE

Place the center tube with the flange against the ground. Each leg is mounted with an M10x20 bolt from the inside of the center tube. Tighten the bolts firmly.

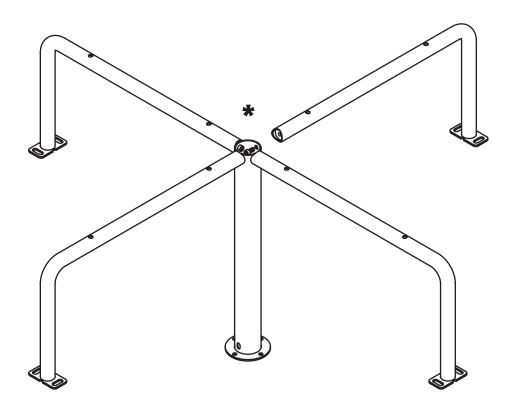

Fastening of the leg.

The bolt is passed through the hole from the inside. Use the Allen key only when the bolt has gotten hold of the thread.

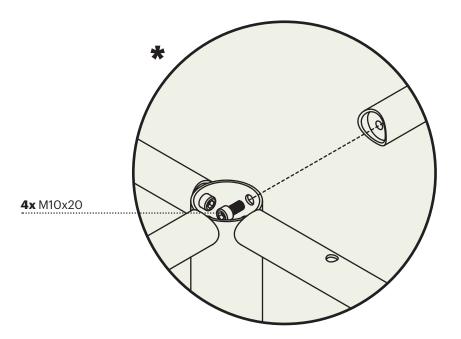

2: FIXATION OF SEAT ONTO LEG FRAME

After the legs are mounted, the frame is turned over so that the seat can be placed on top. The seat comes with a steel frame, ready for fastening. All 8x M10x12 bolts are loosely screwed in and retightened.

Placement of seat Carefully place the seat on top of the leg frame. 0 0 **8x** M10x12

Fastening of the seat

seat to all four legs.


Use M10x12 bolts to fasten the


3: FIXATION OF TABLE ONTO CENTER TUBE

After the seat has been fitted, the table can be carefully laid on the center tube. The table comes with a steel frame, ready for mounting on the center tube. All 4x M10x12 bolts are loosely screwed in and retightened.

Placement of table

Carefully place the table on top of the center tube.

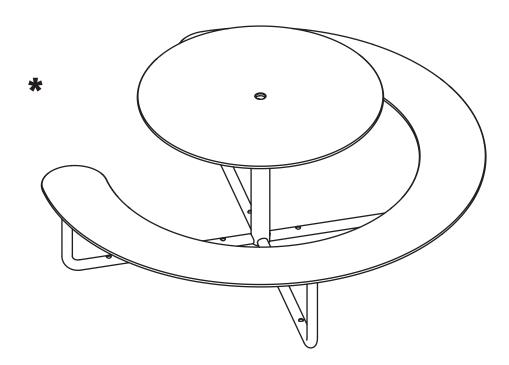

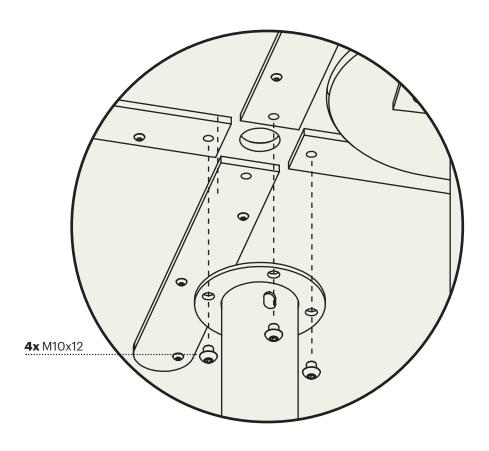

Fastening of the table Use M10x12 bolts to fasten the tables to the center tube.

4: FIXATION OF DISC


Lastly, insert the disc and fixate it through the center tube. Use M8x100, washer and nut.


Insert the disc

The disc fits in the milled surface.

ATTENTION:

- The disc will skewed if the bolt is tightned too hard.

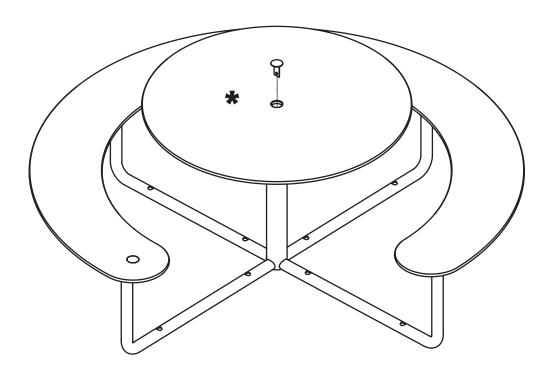

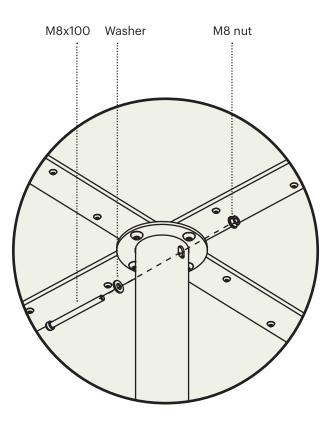

Fastening of the disc

Use M8x100 bolt, nut and washer to fixate.

CLEANING AND MAINTENANCE

Clean the laminate surface with warm water and a soft sponge.

NEVER use the abrasive "green" side of the sponge. Use an ordinary universal cleaner.

Difficult dirt must be removed with a nano sponge and water. Please take a closer look at our website, or contact us for information.



Kigkurren 8A Islands Brygge DK-2300 Copenhagen

> out-sider.dk +45 77 343 341